

hotWave

HEAT MANAGEMENT DEVICE



BY  MEDUSE®
Improved Version 2.0

HEAD PREPARATION

Fill the head with shisha tobacco all around the central vent. Do not press the tobacco hard, but place it gently inside the head so that air will still be able to flow lightly throughout the tobacco mixture.

Place the assembled HMD on the head and make sure there is a gap of at least 2 mm between the the surface of tobacco and the HMD, so that tobacco is not in contact with the bottom of the HMD body.

HOW TO PREPARE HMD AND CONTROL ITS TEMPERATURE

! Before the first use, fill the HMD with hot charcoal and let it burn for 2 hours (don't use for smoking).


1. Place your HMD body onto the head.
2. Place 2-3 pcs of burning charcoal (up to size 26x26x26mm) inside the HMD body.
3. Put the HMD cover onto the HMD body in A position.
4. Wait for 5 minutes, until the HMD gets completely and evenly heated up. Then you can start your shisha session.
5. If you want to change temperature you have to use one of the positions B, C or D.
 - Position B - after heating, 2-3 coals left
 - Position C - after heating when its cold or windy outside
 - Position D - before the end of the smoke session, very small embers

SETTING - UP GLASS HEAD




TEMPERATURE REGULATION


heating aprox. 5 - 7 min.

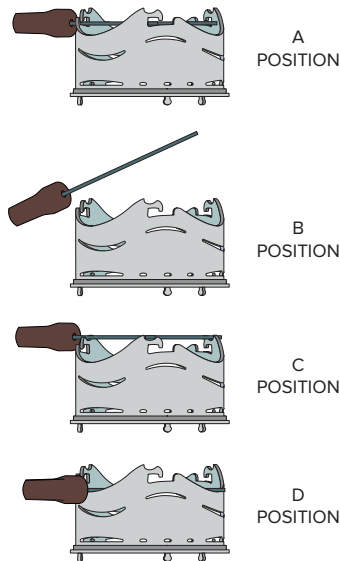

SETTING - UP CLAY HEAD

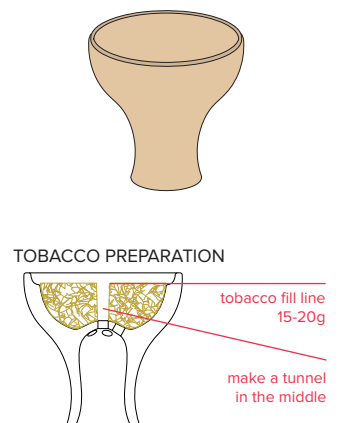

LOCKING THE HMD

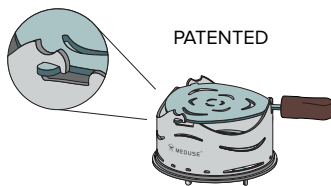

always carry the HMD in the LOCK position

CAUTION!
THE WHOLE HMD CAN BE VERY HOT!

Handle the HMD only by the wooden grip that is part of the HMD cover. Always wash all parts manually. Do not use a dishwasher. It may damage the product! Do not put this product onto any device for heating up the charcoal.



Quality of proper heat management depends on quality of the charcoal used.